

QikFIT Wieland

QikFIT Wieland is part of our ANIMATE range, allowing users to power up our QIKPAC batteries in-situ.



Construction: High strength fire retardant polycarbonate

Colours: Black or white

Electrical Rating: 20A



Power Connectors:

- Power In: GST18i3 male



- Power Out: GST18i3 female

Certifications: AS/NZS61535: 2011 / IEC61535:2019

Dimensions:

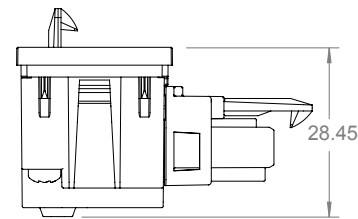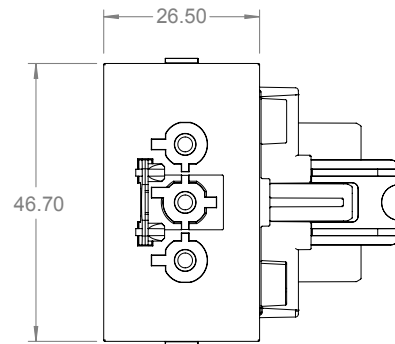

Cutout Information*:
(*For QF05 Wieland Input only)

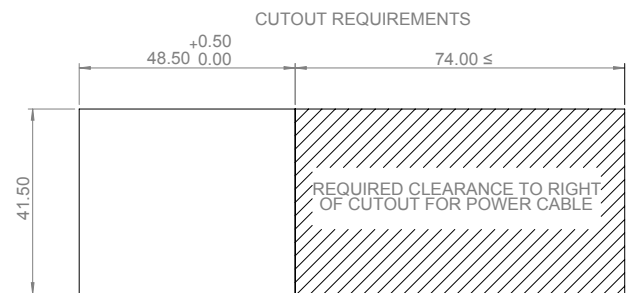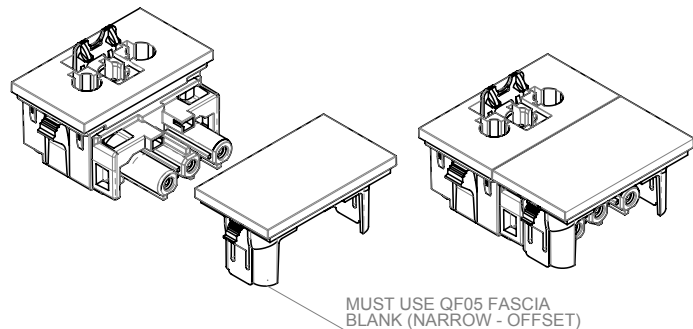

SUITABLE FOR PANEL THICKNESS OF 1.0 - 3.0mm

Please note:

- Installation couplers must not be connected or disconnected under load.
- Dangerous compatibility between different manufacturer installation coupler systems is not automatically prevented by compliance with IEC 61535 or AS/NZS61535
- Installation coupler systems are not replacements for the national domestic plug and socket outlet system.
- GST18i3 connectors must be secured via the retaining means provided.

QikFIT IEC



QikFIT IEC is part of our ANIMATE range, an alternative to QikFit Wieland. QikFit IEC allows QIKPAC batteries to be charged easily without the need to remove and dock them.

Construction: High strength fire retardant polycarbonate

Colours: Black or white

Electrical Rating: 10A



- Power Connectors:

- Power In: IEC C14



Power Out: GST18i3 female

Certifications: AS/NZS61535: 2011 / IEC61535:2019

Dimensions:

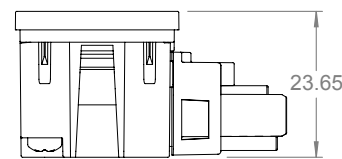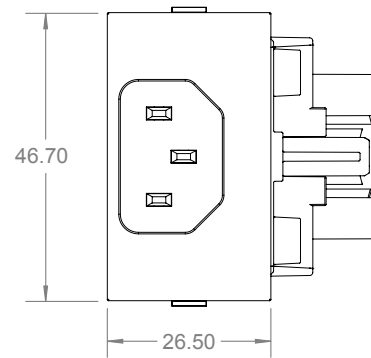

Cutout Information*:
(*For QF05 IEC Input only)

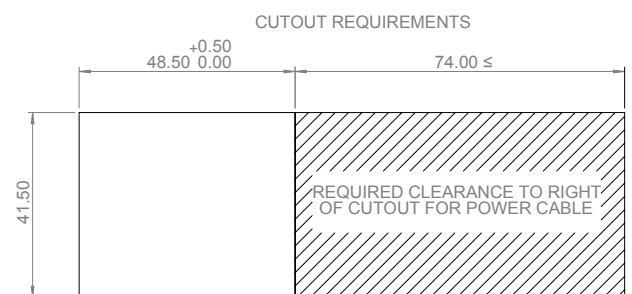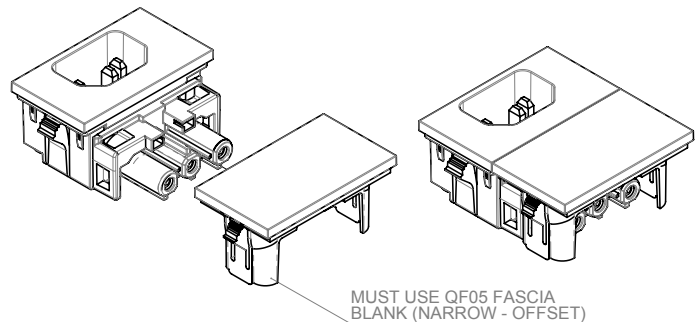

SUITABLE FOR PANEL THICKNESS OF 1.0 - 3.0mm

Please note:

- Installation couplers must not be connected or disconnected under load.
- Dangerous compatibility between different manufacturer installation coupler systems is not automatically prevented by compliance with IEC 61535 or AS/NZS61535
- Installation coupler systems are not replacements for the national domestic plug and socket outlet system.
- GST18i3 connectors must be secured via the retaining means provided.