


Quantity Required




Modular Components

Power

QF45 4GPO



QF25 2GPO



QF35 2GPO 1TUF A + C




Cable

- Standard Qikfit - Male GST to Female GST (no cable)
- Opt 2 - Hardwired 800mm white lead to J Coupler
- Opt 3 - Hardwired 1400mm white lead to J Coupler
- Other Power


Chassis View

Please note that chassis is double sided

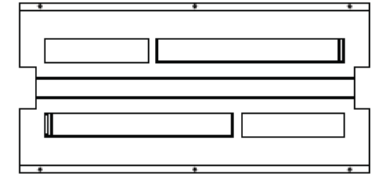


Data & AV -

QF5 Cut Outs - please specify quantities

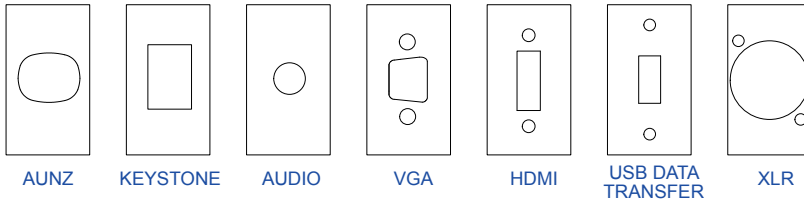

QF5 Couplers - please specify quantities and if data leads are needed

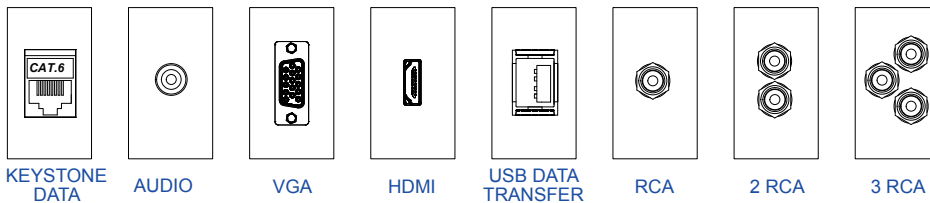

Data leads come in
2000mm
4000mm
8000mm
12000mm
16000mm

AV leads come in
3000mm
5000mm
Please specify lead details below in extra requirements

Lid Options

- Brush Pile
- OR
- Chassis Only - No Lid

- Non-Venerable**
- OR
- Venerable**

Extra Requirements

Apart from Black, all non-standard colour items require a Dulux colour number.

Elsafe will pre-determine power/data positions based on manufacture requirements (unless customer specifies positioning requirements). Please refer to the drawing supplied with your quote for details.

Customer Name:	Address:
Company Name:	Email:
Phone Number:	Project Name: